

REVO®

Fitted with tracks, this unit is ideal for very steep terrains.

PIUMA Track reduces picking time, labour costs and guarantees excellent results.



PIUMA TRACK V2


REVOITALIA.IT

PIUMA TRACK V.2


TECHNICAL SPECIFICATIONS

PIUMA TRACK

Engine	<i>Kubota 18.5 Kw (25 HP) Diesel</i>
Drive	<i>Tracked undercarriage</i>
Track motors	<i>Double speed hydraulics</i>
Speed	<i>1° 1,7 Km/h - 2° 3,4 Km/h</i>
Braking system	<i>Negative brake</i>
Min width with closed platforms	<i>1400 mm</i>
Max width with open platforms	<i>4000 mm</i>
Platform extension	<i>1305 mm each side</i>
Working length	<i>3730 mm</i>
Transport length	<i>2900 mm</i>
Lateral platforms max height	<i>2400 mm</i>
Ground clearance	<i>185 mm</i>
Command system	<i>Electronic</i>
Leveling system	<i>Automatic</i>
Longitudinal	<i>17° / 30%</i>
Lateral	<i>8,5° / 15%</i>
Fruit handling	<i>Single conveyor system</i>
Weight	<i>3100 Kg</i>

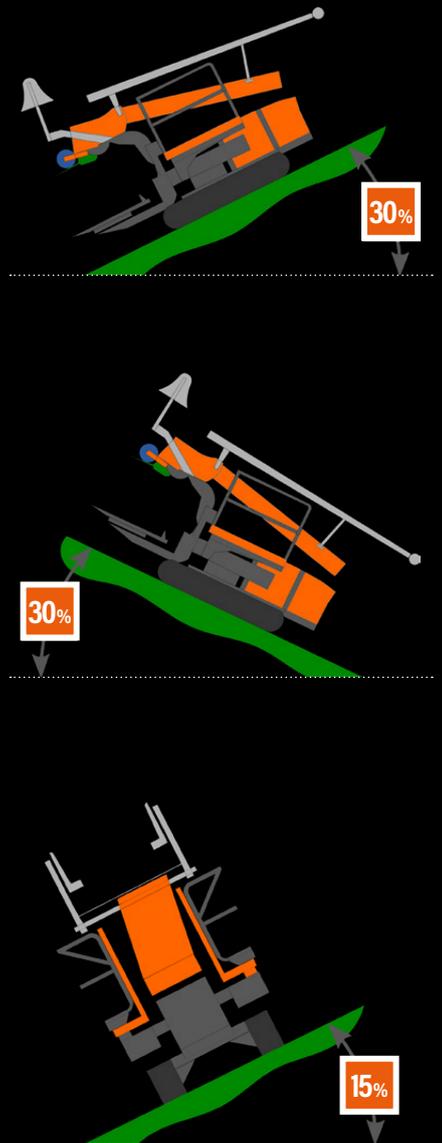

** Specifications and design subject to change without notice.*



REVO S.r.l.

Via de Zinis, 6 - 38011 Cavareno (TN) - Italy

tel. +39 0463 431028

info@revoitalia.it - www.revoitalia.it